



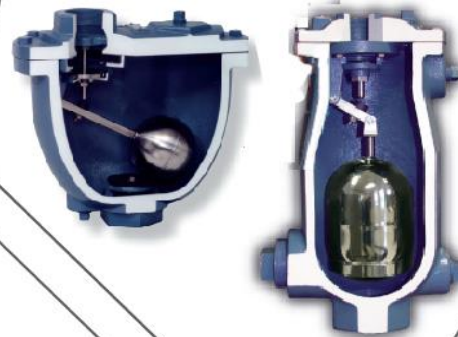

ELITE FLOW CONTROL CO., LTD.

"WE CONTROL THE FLOW"

**Air/Vacuum
Release Valves**

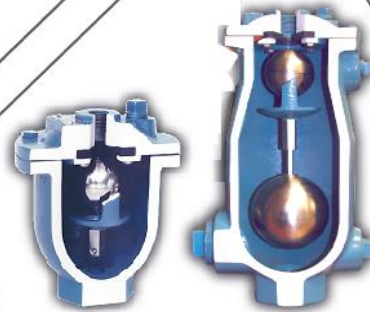



About Company

Elite Flow Control holds the state of art manufacturing facilities equipped with ultra-modern production equipment and exporting the finest quality Automatic Recirculation Valves , Air Release Clean Water Valves , Air Release Waste Water Valves, Air/Vacuum Clean Water Valves, Air/Vacuum Waste Water Valves, Combination Clean Water Valves, Combination Wastewater Valves, Surge-Suppression Air Valves, Vacuum Breaker Air Valves, Vacuum Priming Air Valves and Well Service Air Valves according to the specified / applicable manufacturing standards / grades and can be customized according to the customer's requirements/Specifications.

We operate on philosophy to provide Immediate Response, Excellent Quality, Quick Delivery and Customer Satisfaction followed by commitment as "What we commit, We deliver" based on this we are having satisfied customers in more than 25 countries throughout the world.

We have stringent Quality Management and Control System to ensure the superior quality of products. All of our products are strictly inspected at each stage of the production process from the Inspection of Raw Material to the finish products. Each order is carried out as per Inspection / Test Plan, Required Specifications and Applicable Manufacturing / Quality Standards.

Our Valves are widely used in following process industry:

- | | |
|--------------------|-------------------------------------|
| ❖ Chemicals | ❖ Paper Making Industry |
| ❖ Petrochemicals | ❖ Shipbuilding Industry |
| ❖ Fertilizers | ❖ Environmental Protection Industry |
| ❖ Polymer | ❖ Process Steam Systems |
| ❖ Oil and Gas | ❖ Water Supply Systems |
| ❖ Power Generation | ❖ Fire Protection System |
| ❖ Steel Factories | |

MISSION

Elite Flow Control focused to provide the superior quality products at competitive prices to its customers around the world by utilizing the company's human resources and advanced technology equipment with the strong commitment to R&D, Health, Safety, Environment and company's core values.

VISION

To make our brand "the first choice of customers.

CORE VALUES

The core values of our company guide and drive our business to achieve our mission and a step ahead towards our vision.

Quality: It is our primary focus to produce and deliver superior quality products. Commitment: What we commit, we deliver.

Team Work: We believe on team work which is the most important element to accomplish the set objective.

Customer Satisfaction: To achieve customer satisfaction with our Quality, Commitment and Teamwork



Air Release Clean Water Valves

Air Release Valves, sometimes referred to as “small orifice valves,” are often fitted at the highest point on a pipeline to continually release unwanted air during system operation to protect against unwanted surges and maintain system efficiency.



Air Release Clean Water Valves	
Size	1/2" to 6"
Pressure	Upto 740 psig (5100 kPa).
Material	ASTM A126 Class B cast

Benefits and features

The valve body and cover shall be constructed of ASTM A126 Class B cast iron for working pressures up to 300 psig. Higher pressure rated valves shall be constructed of ASTM A536 Grade 65-45-12 ductile iron.

- **Unconditionally guaranteed T316 stainless steel floats**
- **Simple Lever and Compound Lever Models**
- **Stainless steel 316 internal trim**
- **Resilient seating for positive shutoff**
- **Performance proven for over 40 years**

All Air (Release, Vacuum, etc.) Valves installed in vaults or flood prone locations shall include an inflow preventer to prevent the introduction of contaminated water through the air valve outlet. The inflow preventer shall allow the admittance and exhausting of air while preventing contaminated water from entering during normal operating conditions. The inflow preventer shall be flow tested by an independent third party to certify performance. The third party shall be an approved testing lab of the American Society of Sanitary Engineers.



Air Release Wastewater Valves

Air Release Valves, sometimes referred to as “small orifice valves,” are often fitted at the highest point on a pipeline to continually release unwanted air during system operation to protect against unwanted surges and maintain system efficiency.


	ARW-941
Size	2” to 4”
Pressure	up to 150 psig (1000 kPa)
Material	ASTM A126 Class B Cast iron



Benefits and features

Wastewater Air Valves perform two important functions in a piping system: they maintain system design efficiency and provide system protection. Exhausting and admitting air keeps the system from restricted flow reducing pumping costs and reduces the potential for destructive surges and water hammer that can collapse a pipeline.

- Specifically designed for grit and sewage service without the need for backwashing when combined with fusion bonded epoxy slick coatings
- Bodies are extended in length with a sloped bottom to prevent solid material from reaching the operating mechanism
- Floats are equipped with a specially shaped bottom to accelerate the closure to reduce leakage and clogging of the valve
- Available in lightweight all stainless steel construction to eliminate corrosion
- Unconditionally guaranteed T316 stainless steel floats
- Stainless steel 316 internal trim
- Resilient seating for positive shutoff

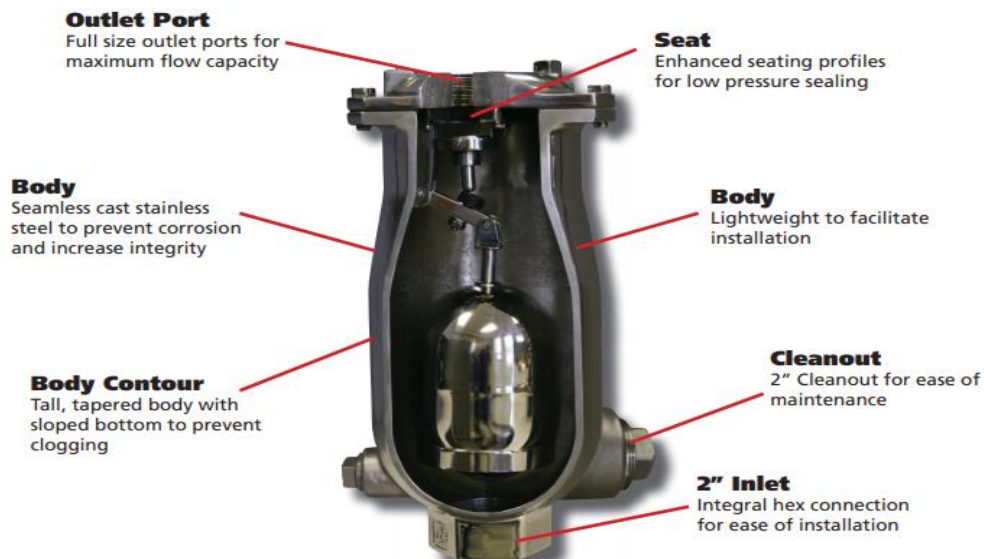



Air/Vacuum Clean Water Valves

Air/Vacuum Valves, often referred to as “large orifice valves”, are used to allow large volumes of air to be exhausted from or admitted into a water pipeline as it is being filled or drained. When draining the pipeline, the float drops, allowing air to enter, preventing loss of pressure, possible pipeline collapse and damaging water column separation.

	EVC-WV
Size	1/2” to 20”
Pressure	up to 740 psig (5100 kPa)
Material	ASTM A126 Class B cast iron for Class 125 and Class 250 valves. Class 300 ductile iron valves shall be constructed of ASTM A536 Grade 65-45-12 ductile iron. Class 300 steel valves shall be constructed of ASTM A216 Grade WCB cast steel

Benefits and features

- Unconditionally guaranteed T316 stainless steel floats
- Stainless steel 316 internal trim
- Exclusive high/low pressure resilient seating
- Full pipe size inlets and outlets provide maximum protection

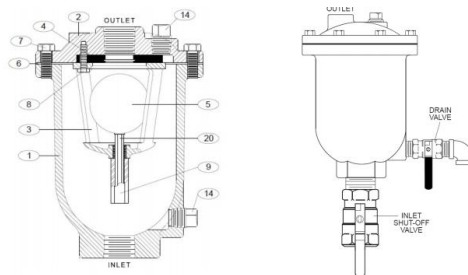

The Air/Vacuum Valve is designed to exhaust large quantities of air upon system start-up and allow air to re-enter the line upon system shutdown or line break. As water enters the valve during start-up, the float will rise, closing the outlet port. The valve will remain closed until system pressure drops to near zero pressure. It will open during shut-down to perform a dual purpose. First, it eliminates the possibility of a vacuum forming and a potential pipeline collapse. Second it allows rapid drainage of the line when system maintenance is required.




Air/Vacuum Wastewater Valves

Air/Vacuum Valves, often referred to as "large orifice valves", are used to allow large volumes of air to be exhausted from or admitted into a water pipeline as it is being filled or drained. When draining the pipeline, the float drops, allowing air to enter, preventing loss of pressure, possible pipeline collapse and damaging water column separation.

	EVW-0381
Size	1" to 8"
Pressure	150 psig (1000 kPa)
Material	ASTM A126 Class B Cast Iron

Benefits and features

- Extended body with sloped bottom
- Fusion Bonded Epoxy slick coat available - to prevent clogging
- Available in light weight all stainless steel construction to eliminate corrosion
- Dual float assembly - for positive seating
- Unconditionally guaranteed T316 stainless steel floats
- Stainless steel 316 internal trim
- Exclusive high/low pressure resilient seating
- Full pipe size inlets and outlets provide maximum protection

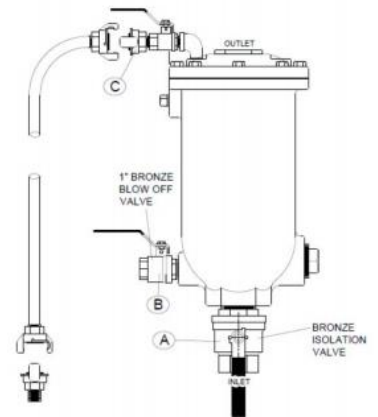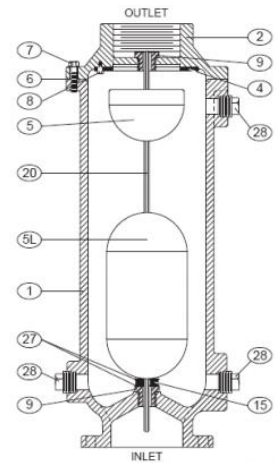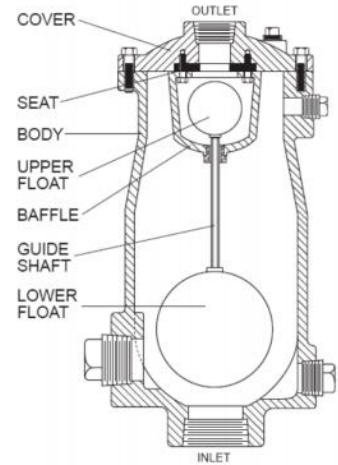



Combination Clean Water Valves

Combination Air Valves perform the functions of an Air/Vacuum Valve (exhaust large quantities of air on start-up, admits air on shut-down) and Air Release Valves (release air continuously during operation) to maintain system efficiency and prevent pipeline surges.

	ECC-W0191
Size	1" to 20"
Pressure	Upto 740 psig (5100 kPa)
Material	ASTM A126 Class B cast iron for Class 125 and Class 250 valves. Class 300 ductile iron valves shall be constructed of ASTM A536 Grade 65-45-12 ductile iron. Dual Body Class 300 steel valves shall be constructed of ASTM A216 Grade WCB cast steel.

Benefits and features

- Extended body with sloped bottom
- Fusion Bonded Epoxy slick coat available - to prevent clogging
- Available in light weight all stainless steel construction to eliminate corrosion
- Dual float assembly - for positive seating
- Unconditionally guaranteed T316 stainless steel floats
- Stainless steel 316 internal trim
- Exclusive high/low pressure resilient seating
- Full pipe size inlets and outlets provide maximum protection

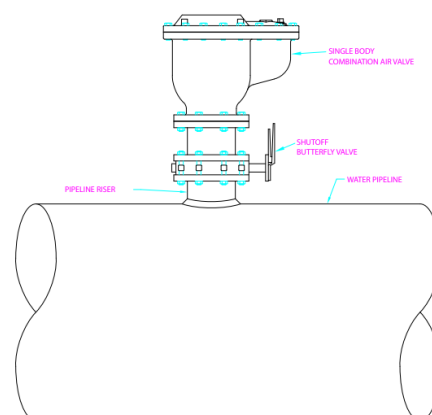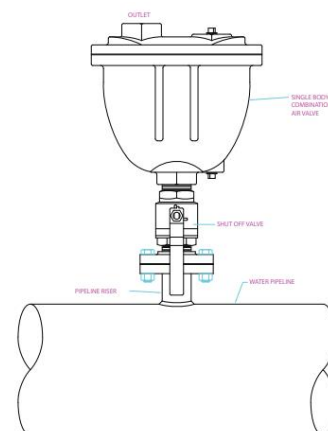




Combination Wastewater Valves

Air/Vacuum Valves, often referred to as “large orifice valves”, are used to allow large volumes of air to be exhausted from or admitted into a water pipeline as it is being filled or drained. When draining the pipeline, the float drops, allowing air to enter, preventing loss of pressure, possible pipeline collapse and damaging water column separation.

	ECW-V0282
Size	1" – 8"
Set Pressure	up to 150 psig (1000 kPa).
Connection	ASTM A126 Class B cast iron

Benefits and features

- Single body incorporates both features within one valve
 - More compact and economical
- Dual body consists of two independent valves
 - Allows individual maintenance while still protecting pipeline
 - Wider range of sizing options
- Inlets and outlets are equal to full nominal size
- Available in light weight all stainless steel construction to eliminate corrosion
- Unconditionally guaranteed T316 stainless steel floats
- Stainless steel 316 internal trim
- Exclusive high/low pressure resilient seating

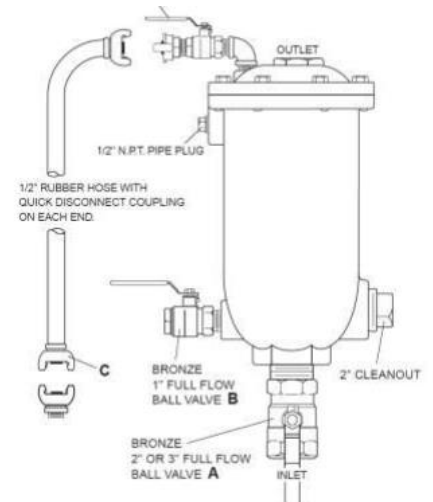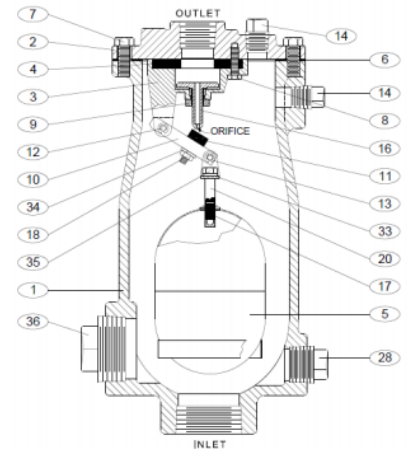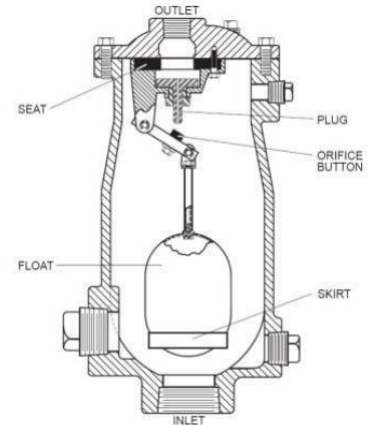


Vacuum Breaker Air Valves

For critical applications where vacuum protection is a must or where column separation is predicated, a vacuum breaker is used. The Vacuum Breaker is mounted at critical pipeline high points, penstocks, or tanks and allows for rapid inflow of atmospheric air to reduce vacuum conditions in piping systems.

	EVB-BAV01
Size	1/2" - 42"
Pressure	400 psig (2760 kPa)
Material	ASTM A126 Class B cast iron for Class 125 and Class 250 valves

Benefits and features

- Full flow areas provide maximum vacuum protection for pipelines and tanks
- Resilient seals provide drop tight seating
- Connections for optional air release valve - to vent entrained air
- Available with optional inflow preventer
- Available with optional screened hood

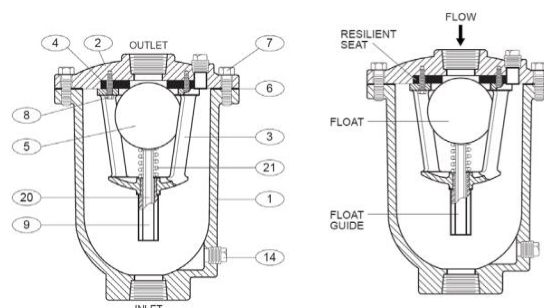

The Vacuum Breaker is designed to prevent vacuum conditions from occurring in pipes or tanks. After a power failure or rapid draining of the system, a vacuum condition often occurs in a pipe or tank. The pressure difference between the inside vacuum and outside air will cause a downward force on the float. At vacuum pressures greater than -0.25 psig, the float will compress the spring and move downward allowing free flow of outside air into the pipe or tank to eliminate the vacuum.

When positive pressure is restored in the pipe or tank, the vacuum breaker will automatically close and seal tightly against the resilient seat. Optional valves can be piped to the vacuum breaker to vent trapped air in the pipeline if needed. The valve may be supplied with an optional threaded hood for insertion into the top of the valve.

The only moving parts in the valve are the float and the spring. The float guide controls the movement of the float and assures that the float contacts the seat evenly.




Vacuum Priming Air Valves

The purpose of a Vacuum Priming Valve is to automatically allow air to be drawn out of the pumping system until the pump fills with water. Then, when the water reaches the priming valve, the float rises and closes the priming valve to prevent fluid from flowing to the vacuum priming system. The priming valve will continue to release air while the pump is running.

	EVP-PAV031
Size	2"
Pressure	150 psig (1000 kPa).
Material	ASTM A126 Class B cast iron

Benefits and features

- Specifically designed to prevent fluid leakage
- Flow sensitive float
- Stainless steel 316 internal trim and float
- Available with optional water level control switch
- Compatible with any vacuum priming system

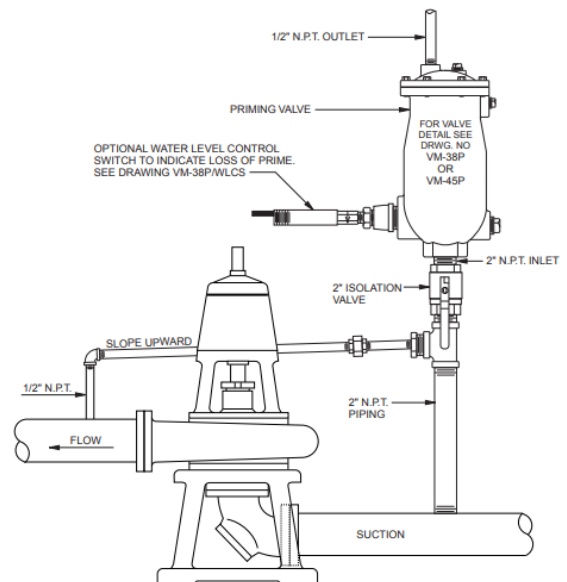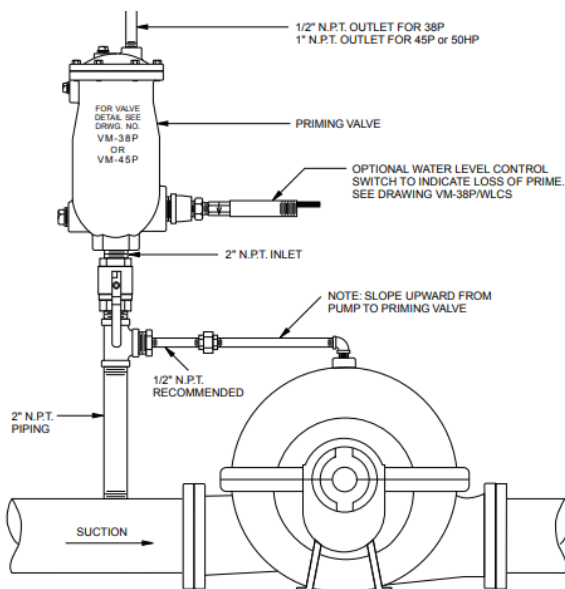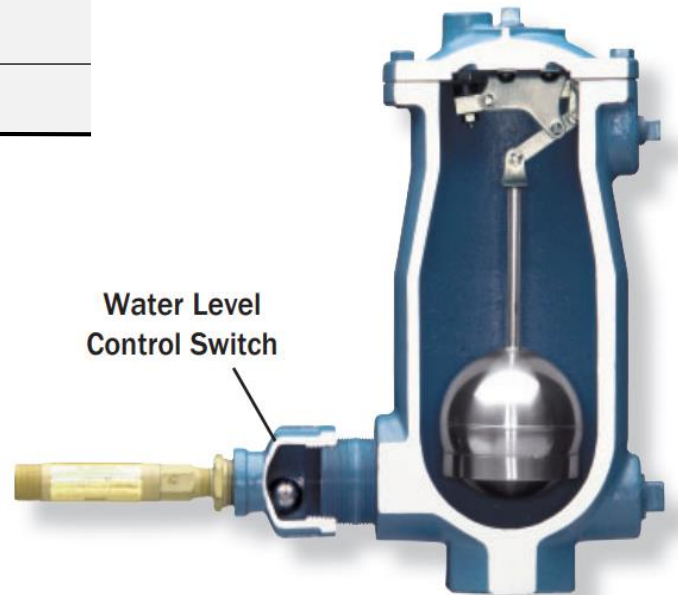




Well Service Air Valves

Well Service Air Valves are a member of the Air/Vacuum family and are used with vertical pumps. Well Service Valves are specifically designed to vent the air from the pump column during pump start-up in a controlled manner before the check valve opens to reduce pressure surges that result from the accelerating water column.

	EWA-W0281
Size	1/2" – 12"
Pressure	150 psig (1000 kPa).
Material	ASTM A126 Class B cast iron


Benefits and features

- Unconditionally guaranteed 316 stainless steel floats
- Inlets and outlets are equal to full nominal pipe area
- Dual Port Throttling Device
 - Adjustable discharge outlet provides regulated air exhaust
 - Allows air to enter the system on pump shut down through an unrestricted independent vacuum port
- Regulated-Exhaust Device
 - Restrictor disc provides regulated exhaust to limit pump column surges
 - Ability to adjust air exhaust for greater surge suppression
 - Provides full vacuum flow port

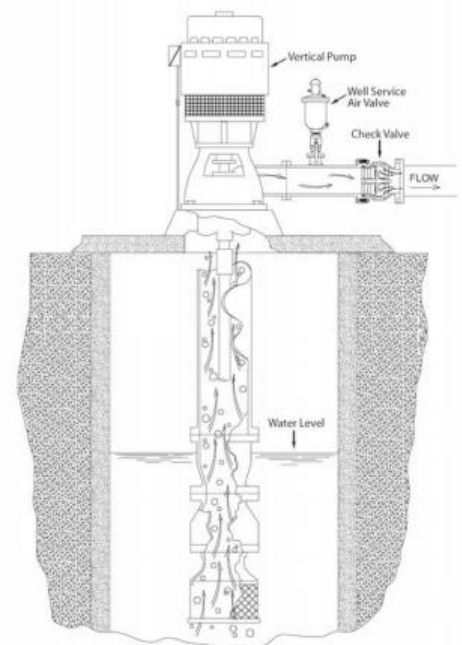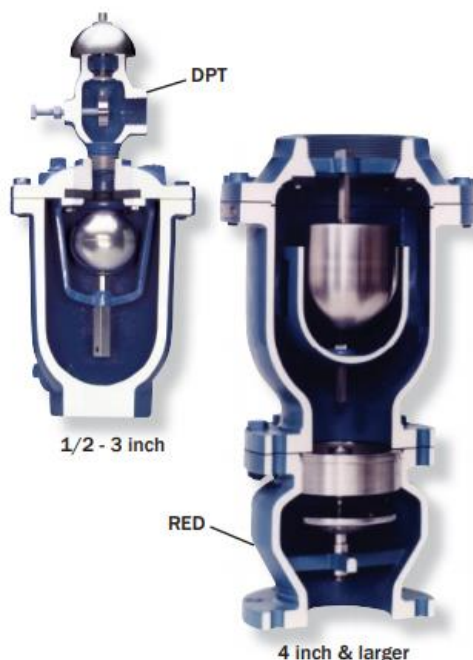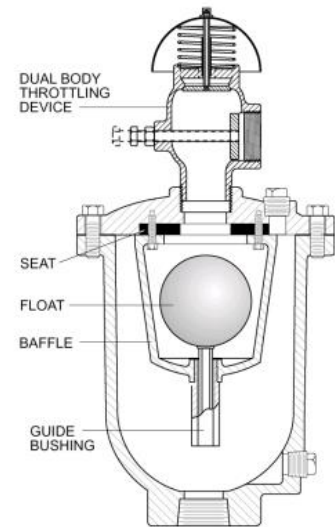



"WE CONTROL THE FLOW"

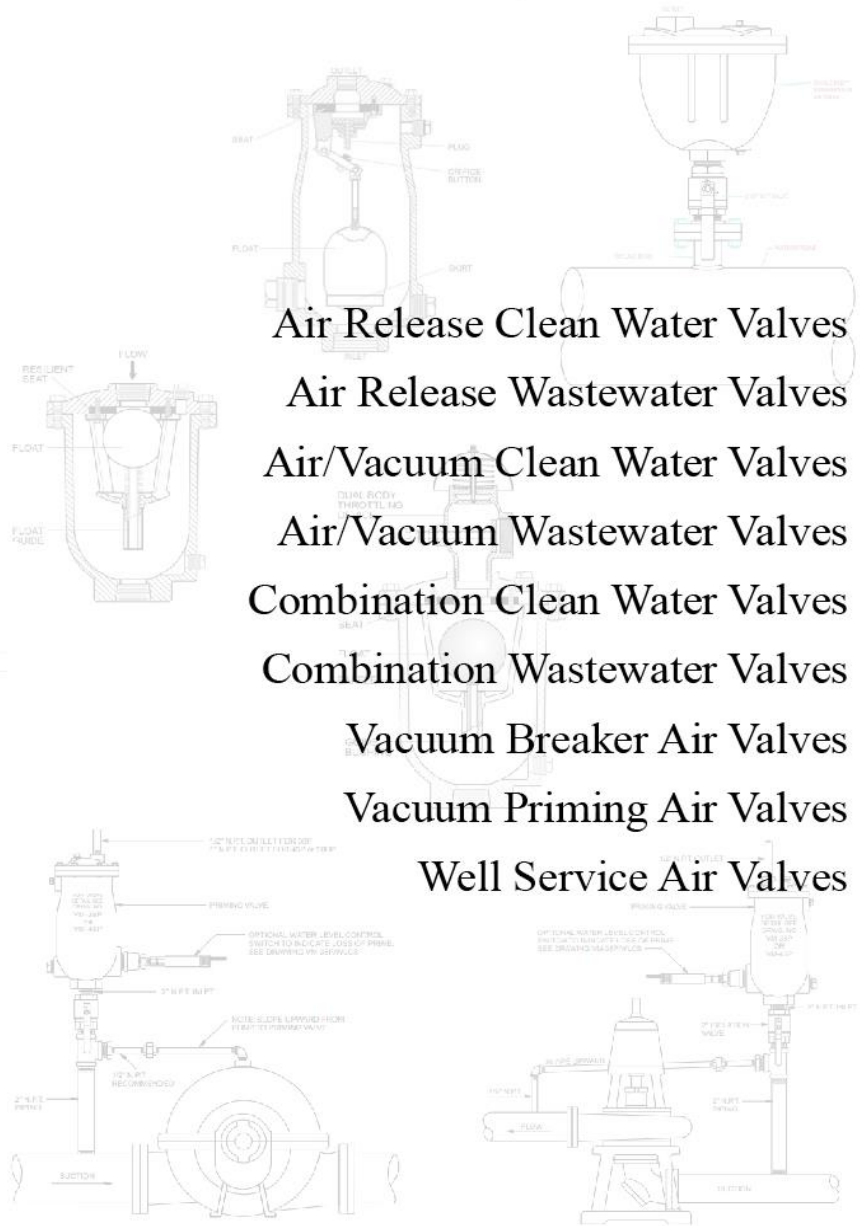

Air Release Clean Water Valves

Air Release Wastewater Valves

Air/Vacuum Clean Water Valves

Air/Vacuum Wastewater Valves

Combination Clean Water Valves

Combination Wastewater Valves

Vacuum Breaker Air Valves

Vacuum Priming Air Valves

Well Service Air Valves

Wenzhou Elite Flow Control Co., Ltd.

Zhongou International Office Building,
Office No. 1206, Yangguangdadao Street,
Oubei Town, Yongjia, Wenzhou city,
Zhejiang Province, China.



+86-577-66965398 / +86 577-66965368



+86-577-66965398



sales@airvacumvalves.com

Elite Flow Control UK Limited

3rd Floor, 207 Regent Street, London,
United Kingdom, W1B 3HH

Elite Flow Control USA Inc

4840 Irvine Blvd Ste 205, Irvine,
CA 92620, U.S.A.

Factory

Puxi Village, Oubei Sub-district,
Yongjia, Wenzhou, Zhejiang, China.

www.airvacumvalves.com